



CERADOME SERIES

ROUND INLET SOLID STREAM NOZZLES



Sharp Reliable Cutting Action



The "CERADOME" Nozzle



Shower Header Adaptors

CHARACTERISTICS

High-Impact solid steam. With reduced clogging design by means of nozzle inlet projecting into the header pipe, helping prevent foreign matter from depositing into orifice. Even more effective when used with brush system.

CONSTRUCTION & MATERIALS

303 Stainless steel body complete with ceramic tip inserted and adhered into body with special ceramic/metal adhesive. - Other special materials and configurations available.

APPLICATIONS

Washing felts and screens in paper mills and processing equipment, cleaning machine parts, bottles etc. Wherever a high impact, hard wearing, sharp solid stream is required.

PERFORMANCE CHARACTERISTICS


Nozzle Part No. 1/4" BSP	Spray Capacity in l/min. at Various Pressures BAR.G						
	3 bar	5 bar	6 bar	7 bar	10 bar	20 bar	30 bar
SNE-SS6-CER-08	0.59	0.76	0.84	0.90	1.10	1.50	2.00
SNE-SS6-CER-10	0.79	1.00	1.10	1.20	1.40	2.00	2.70
SNE-SS6-CER-12	1.20	1.50	1.70	1.80	2.20	3.10	4.00
SNE-SS6-CER-14	1.60	2.00	2.20	2.40	2.90	4.10	5.40
SNE-SS6-CER-15	2.00	2.50	2.80	3.00	3.60	5.10	6.70
SNE-SS6-CER-17	2.40	3.10	3.30	3.60	4.30	6.10	8.10
SNE-SS6-CER-20	3.20	4.10	4.50	4.80	5.80	8.20	10.80
SNE-SS6-CER-22	3.90	5.10	5.60	6.00	7.20	10.20	13.50
SNE-SS6-CER-27	5.90	7.60	8.40	9.00	10.80	51.30	20.00
SNE-SS6-CER-32	7.90	10.20	11.20	12.10	14.40	20.00	27.00

SPECIAL APPLICATIONS

Special shower head adaptors are available ex-stock for most common shower brands.

Please contact factory for details.

Custom design variations and materials are also available for your specific applications.

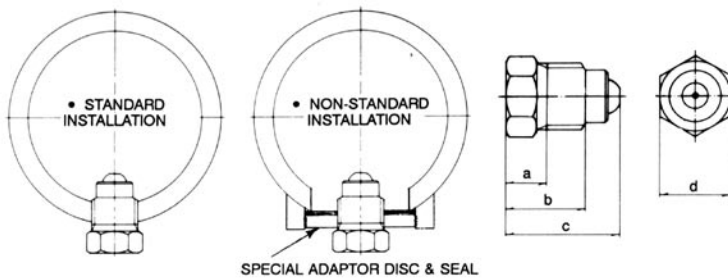

Std. Conn. Size	Dimensions (mm)				Weight (gr.)
	a	b	c	d	
1/4M	15	16.5	23.5	8	17

HOW TO ORDER

If you require, for example an 0.8mm ceradome with 1/4" thread in stainless steel, order as follows:

SNE-SS8-CER-08

Spray Nozzle Engineering Pty.Ltd. St/St 1/4" bsp Body Ceramic Tip 0.8mm Orifice

WARRANTY: The manufacturer will replace, repair or refund the purchase price of The Product at their option, free of charges, except transportation, if defective in their manufacture. Claims must be notified to the manufacturer within 90 days of sale or shipment either of which occurs first. The Product should be returned to the place of purchase. This warranty is exclusive remedy and the Manufacturer/Distributor shall not be liable for consequential damages, injury or commercial loss. The Manufacturer/Distributor makes no warranty of fitness for a particular purpose and makes no other warranty, express or implied arising from the course of dealing or usage in trade. Specification subject to change without notice. Chemical and Temperature compatibility is responsibility of purchaser, compatibility charts available at request.

DISTRIBUTED BY:

