

1.5" DC REMOTE CONTROL MONITOR

FP-15-350-RCE (Carbon Steel) | FP-SS-15-350-RCE (Stainless Steel)

190-1325 LPM

SPECIFICATIONS

Fire Pro® remote control electric monitors are designed for fire, mining, petrochemical and heavy industrial applications. The balanced flow single waterway design and precision machining in 304ss swivel joint design reduces friction loss while improving stream and spray reach distance ensuring ease of operation at all pressure and flow ranges. Available in carbon steel and stainless steel construction with standard red polyester powder coating inside and out to protect against corrosion.




FEATURES

- 1.5" Low friction loss waterway
- Seamless carbon or stainless steel construction
- Zerk fitting for lubrication
- 12vDC or 24vDC Power required
- 340° horizontal and 150° vertical sweep
- Stainless steel remote control box w / joystick
- 2-1/2" NH male outlet
- 3-14 bar operating pressure
- Optimum inlet operating pressure is 7.5 bar

OPTIONS

- Metric / Imperial flanges
- Shut off valve

Pressure Loss Chart

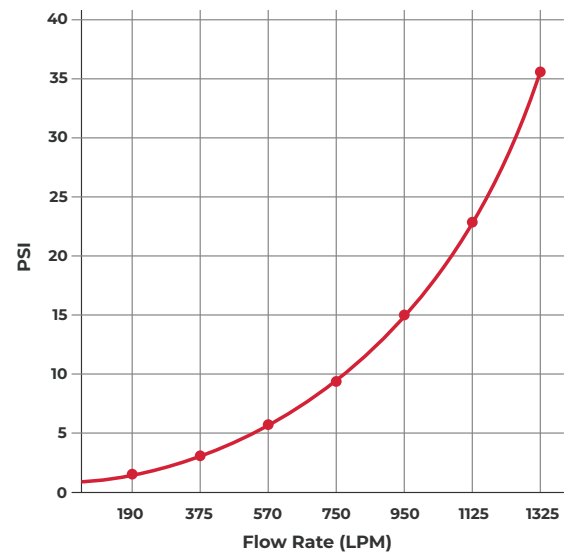

Model	Inlet	Outlet	Weight
FP-15-350-RCE / FP-SS-15-350-RCE	1.5" Flange	1.5" NH	11kg

