

2.5" HYDRAULIC MONITOR

FP-25-1000-HYD (Carbon Steel) | FP-SS-25-1000-HYD (Stainless Steel)

950-3785 LPM

SPECIFICATIONS

Fire Pro® hydraulic monitors are designed to meet all requirements of municipal and petrochemical applications. The balanced flow single waterway design and precision machining on swivel joints reduces friction loss while improving stream and distance, and ensures ease of operation at all pressure / flow ranges. Carbon steel and stainless steel construction with 304 stainless steel swivels. Standard red polyester powder coating inside and out protect against corrosion. Type 304 stainless steel ball bearings in joints ensure easy movement and reliable operation.

FEATURES


- 2.5" Low friction loss waterway
- Seamless carbon or stainless steel construction
- Zerk fitting for lubrication
- Hydraulic power required
- 340° horizontal and 150° vertical sweep
- 2-1/2" NH male outlet
- 3-14 bar operating pressure
- Optimum inlet operating pressure is 7.5 bar

OPTIONS

- Metric / Imperial flanges
- Shut off valve



Pressure Loss Chart

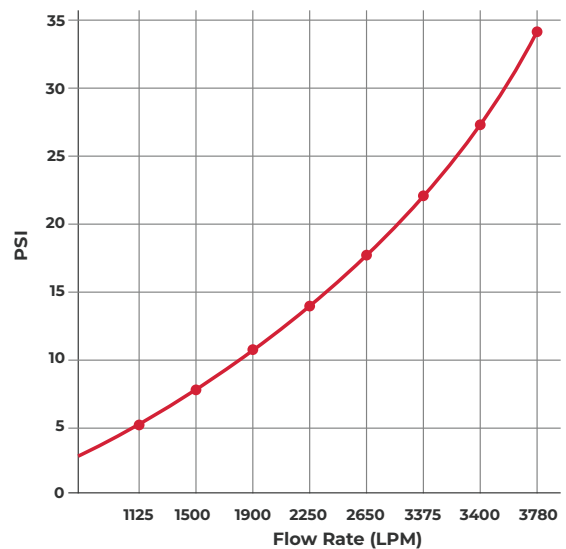

Model	Inlet	Outlet	Weight
FP-25-1000-HYD / FP-SS-25-1000-HYD	3" 150# RF Flange	2.5" NH	24kg

