

SILVENT 007-S

TECHNICAL DATA

Replace open pipe Ø (mm)	4
Blowing force (N)	2.8
Air consumption (Nm³/h)	16
Sound level (dB(A))	81
Nozzle technology	Slot
Material (nozzle)	1.4404 (316L)
Connection	G 1/4"
Weight (g)	205
Max temp (°C)	70
Max op. pressure (MPa)	0.7

Noise reduction **14 dB(A)**

Energy savings **14 Nm³/h**

Feed pressure = 500 (kPa)

Material specification: Delrin 100P BK602, EN AW 2011 T8, EN 10270-3-1.4310, Desmopan 460, NBR 70, EN 1.0718, PUR, EN 10305-1, Fzb, EN 1.4404


*For further information, see page 166 or visit silvent.com.



007-S fitted with a protective screen (590) to prevent splash-back on the operator.

EXTENSION PIPES IN 6 LENGTHS

Standard - 100 mm

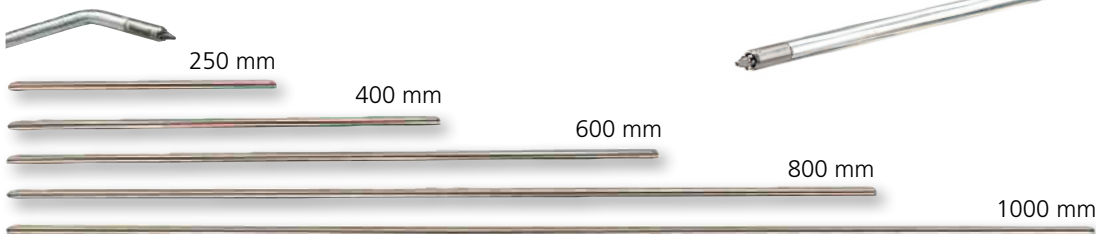

Our 007 safety air gun series is available with six different extension pipe lengths. The pipes are made of galvanized steel. When ordering safety guns with extension pipes that are longer than 100 mm (4"), specify the pipe length last in the order number. Air blow gun-extension pipe length: e.g. **007-S-1000**.

EXTENSIONS

250 mm	007-S-250
400 mm	007-S-400
600 mm	007-S-600
800 mm	007-S-800
1000 mm	007-S-1000

