



InTech

SILVENT 730 C: with aerodynamic slots to allow optimal utilisation of compressed air while keeping the noise level to a minimum.

Blowing force approximately 30 times stronger than SILVENT 701 (98.0 N (21.6 lbs)).

For applications requiring more concentrated force on the center of the object to be cleaned, dried, cooled, transported, etc.

The extra slot nozzle in the middle increases air velocity and thereby blowing force, while retaining the air cone pattern of a SILVENT 720.

Specially made entirely of stainless steel.

Part of SILVENT's 700 C series, together with 707 C and 715 C.

Order no: **730 C**

TECHNICAL DATA

Replace open pipe Ø (mm)	25
Blowing force (N)	98.0
Air consumption (Nm³/h)	636
Sound level (dB(A))	105
Nozzle technology	Slot
Material (nozzle)	1.4305 (303)
Connection	G 1"
Weight (kg)	0.6960
Max temp (°C)	400
Max op. pressure (MPa)	1.0

Noise reduction* **84%**


Energy savings* **45%**

Material specification: EN 1.4305

Blowing dist. (mm)	Blowing coverage (mm)
50	200
100	260
200	315
300	370
400	445
500	485

*For further information, see page 150 or visit silvent.com.

Dimensions

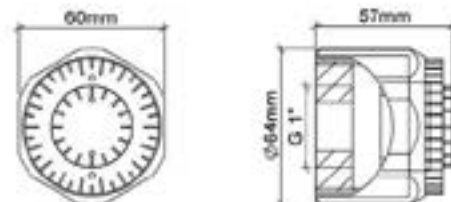

ALTERNATIVES

730 CA



SILVENT 730 CA: adjustable variation of 730 C. Allows up to 30° blowing angle regulation from the centerline. Time required for installation and fine tuning of the blowing angle is decreased considerably. Same performance as 730 C.