

SERIES SFR900


Fuel Dispensing (Consult factory)

Water Oil Evacuation

Bulk Transfer

TO HANDLE 1-1/4" OR 1-1/2" I.D. HOSE.

- Rollformed channel frame for heavy-duty applications.
- Non-sparking ratchet assembly.
- Declutching arbor to prevent damage from reverse winding.
- Standard inlet: 90° swivel joint, 1-1/2" female NPT threads, and 2" Victaulic® groove.
- Standard outlet: 1-1/2" female NPT threads.
- Standard pressures to to 600 psi (41 bar)
- Temperatures from -20° F to +400° F (-29° C to +204° C)
- 4-way roller assembly SR and VR roller positions: swivel joint is standard on the right. TR roller positions: swivel joint is standard on the left. Other configurations available, must specify.
- Vacuum service – consult factory.

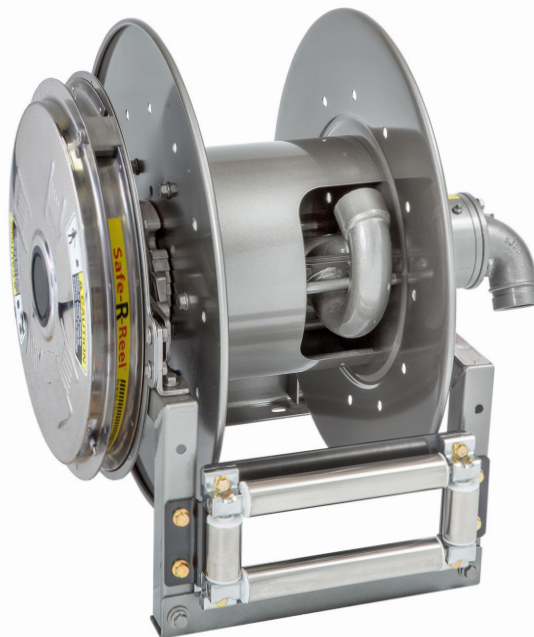

PARTS DRAWING - ISO 29

Model Number	Hose Capacity feet m			Approx. Weight lb. kg	Standard Roller Assy.	Reel Dimensions*** in. mm									
	I.D. in. mm	1-1/4 32	1-1/2 38			A	B	C	D	E	F	G	H	X	Y
	O.D. in. mm	1-13/16 46	2-1/16 52												
SFR922-23-24B		40 12	25 8	142 64	R310	15.25 387	10 254	10.5 267	25.25 641	22.75 578	27.25 692	23.88 607	12.5 318	10.5 267	20 508
SFR920-25-26A		50 15	40 12	165 75	R308	13.25 337	8 203	10.5 267	27 686	24.75 629	26 660	25.88 657	13.5 343	8.5 216	21.75 552
SFR922-30-31A		75 23	50 15	194 88	R310	15.25 387	10 254	10.5 267	30.5 775	28.75 730	28 711	31.38 797	17 432	10.5 267	25.25 641

Notes:

A hose stop is necessary to keep spring from unwinding.

1. Specifications subject to change.
2. Reel models and capacities shown are for standard drag applications; for vertical lift applications, consult factory.
3. Other sizes, from standard components, available on request.
4. Be sure to check dimensions and weights prior to ordering.

Notice:

A flexible connector must be used between the inlet pipe and the inlet swivel joint.

*Dimensional weight will apply when shipped as a package

*** X,Y indicate mounting holes.

Available roller positions:



SR (STD)



VR (OPT)



TR (OPT)



TR (Wallmount)

