

SERIES SFRN700

Lubrication

Air/ Water

Assembly Operations


Washdown

Air Tools

General Industrial Applications

TO HANDLE 1/4" THROUGH 1/2" I.D. HOSE.

- Narrow frame and compact mounting base.
- Non-sparking ratchet assembly.
- Declutching arbor to prevent damage from reverse winding.
- Standard inlet: 90° balanced pressure swivel joint, 1/2" female NPT threads.
- Standard outlet: 1/2" female NPT threads.
- Standard pressures to 3000 psi (207 bar), available up to 10,000 psi (690 bar) – must specify.
- Temperatures from -60°F to +250°F (-51°C to +121°C), optional temperatures to +400°F (+204°C) – must specify.
- 4-way roller assembly.
- SR and VR roller positions: swivel joint is standard on the right. TR roller positions: swivel joint is standard on the left. Other configurations available, must specify.

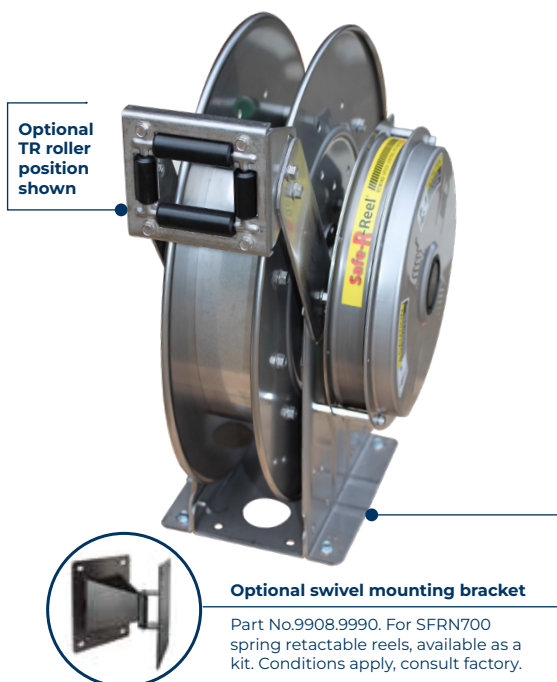

Optional swivel mounting bracket

Part No.9908.9990. For SFRN700 spring retractable reels, available as a kit. Conditions apply, consult factory.

PARTS DRAWING - ISO 79

Model Number	Hose Capacity feet m				Approx. Weight lb. kg	Standard Roller Assy.	Reel Dimensions*** in. mm							
	I.D. in. mm	1/4 6	3/8 10	1/2 13			A	B	C	E	F	G	H	X
	O.D. in. mm	5/8 16	3/4 19	7/8 22										
SFRN716-19-20-10.5J			50 15	50 15	102 46	N204	10 254	4 102	10.5 267	20.75 527	14.50 368	20 508	10.62 270	8 203
SFRN716-23-24-15.5J			65 20	65 20	117 53	N204	10 254	4 102	15.5 394	23.75 603	14.50 368	24 610	12.62 321	8 203
SFRN716-23-24-15.5G		100 30	75 23	65 20	132 60	N204	10 254	4 102	15.5 394	23.75 603	14.50 368	24 610	12.62 321	8 203
SFRN716-25-26-15.5B			75 23	75 23	128 58	N204	10 254	4 102	15.5 394	25.25 641	14.50 368	26 660	13.62 346	8 203
SFRN718-25-26-15.5G			100 30	100 30	134 61	N206	12 305	6 152	15.5 394	25.25 641	16.50 419	26 660	12.62 346	10 254

Notes:

A hose stop is necessary to keep spring from unwinding.

1. Specifications subject to change.
2. Reel models and capacities shown are for standard drag applications; for vertical lift applications, consult factory.
3. Other sizes, from standard components, available on request.
4. Be sure to check dimensions and weights prior to ordering.

Notice:

A flexible connector must be used between the inlet pipe and the inlet swivel joint.

*Dimensional weight may apply when shipped as a parcel package (via FedEx or UPS Ground).

*** X,Y indicate mounting holes.

Available roller positions:



SR (STD)



VR (OPT)



TR (OPT)



TR (Wallmount)

