

SERIES SFRN800

Fuel Dispensing (Consult factory)

Lubrication


Air / Water

Washdown

Air Tools

TO HANDLE 3/4" OR 1" I.D. HOSE.

- Narrow frame and compact mounting base.
- Non-sparking ratchet assembly.
- Declutching arbor to prevent damage from reverse winding.
- Standard inlet: 90° balanced pressure swivel joint, 1" female NPT threads.
- Standard outlet: 1" female NPT threads.
- Standard pressures to 2000 psi (138 bar), available up to 6000 psi (414 bar) – must specify.
- Temperatures from -40°F to +250°F (-40°C to +121°C), optional temperatures to +400°F (+204°C) – must specify.
- 4-way roller assembly.
- SR and VR roller positions: swivel joint is standard on the right. TR roller positions: swivel joint is standard on the left. Other configurations available, must specify.

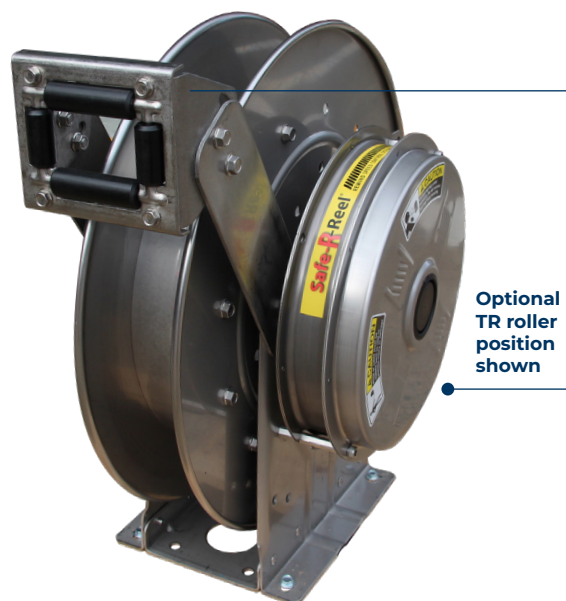

PARTS DRAWING - ISO 81

Model Number	Hose Capacity feet m			Approx. Weight lb. kg	Standard Roller Assy.	Reel Dimensions*** in. mm							
	I.D. in. mm	3/4 19	1 25			A	B	C	E	F	G	H	X
	O.D. in. mm	1-9/32 33	1-1/2 38										
SFRN816-19-20-10.5J		25 8	15 5	113 51	N204	10 254	4 102	10.5 267	20.75 527	16.25 412	20 508	10.62 270	8 203
†SFRN818-23-24-10.5J		50† 15†	25† 8†	125 56	N206	12 305	6 152	10.5 267	23.75 603	18.25 463	24 610	12.62 321	10 254
SFRN816-25-26-10.5B		60 18	35 11	134 61	N204	10 254	4 102	10.5 267	25.25 641	16.25 412	26 660	13.62 346	8 203
SFRN818-25-26-10.5B		70 21	50 15	140 63	N206	12 305	6 152	10.5 267	25.25 641	18.25 463	26 660	13.62 346	10 254

Notes:

A hose stop is necessary to keep spring from unwinding.

1. Specifications subject to change.
2. Reel models and capacities shown are for standard drag applications; for vertical lift applications, consult factory.
3. Other sizes, from standard components, available on request.
4. Be sure to check dimensions and weights prior to ordering.

Notice:

A flexible connector must be used between the inlet pipe and the inlet swivel joint.

*Dimensional weight will apply when shipped as a package


*** X,Y indicate mounting holes.

†Capacity based on low pressure air hose only.

Available roller positions:



SR (STD)



VR (OPT)



TR (OPT)



TR (Wallmount)

